

Model A

Last Update | Sept 2023

Overview



Less noise, better rest

Ideal for individuals having difficulty falling asleep.
If you are highly sensitive to noise or suffer from insomnia, we have a sleeping cabin that provides the optimal environment for sleep induction and rest.

Freestanding sound isolation booth with modular design:
Our unique, patented technology ensures easy assembly and disassembly, letting you position the booth in the most convenient spot in your home.

Sustainable materials.
Our cabins are designed with environmentally friendly and long-lasting materials that also ensure a safe space for your health.

Quick & easy to assemble:



Measurements

Outside (WxLxH)	121 x 213 x 226 cm (3.97 x 6.99 x 7.41 ft)
Inside (WxLxH)	105 x 197 x 210 cm (3.44 x 6.46 x 6.89 ft)
Minimum ceiling height	232 cm (7.61 ft)
Weight	655 kg (1444 lb)
Minimum distance from room's walls	5 cm (2 in)

Insulation

Two-way sound isolation	Yes
Acoustic measurement (dB)	Approximately 46 dB in accordance with ISO 717-1

Structure

Wall thickness	8 cm (3.5 in)
Floor	Floating floor
Ecofriendly material	Yes (very low emissions)

- NAF MDF (non added formaldehyde).
- Water-based paint, no use of solvents.
- Structural acoustic insulator made from 100% recycled (no use of mineral wool).
- Non-invasive wood-glue is used to adhere layers.
- Eco45 absorbers are made with recycled P.E.T. (thermally bonded, without chemical binders) and fixed tightly with water-based adhesive.

Fire safety	Yes
-------------	-----


- Roof absorber: recycled PET felt based on recycled vegetable cotton bras. Euroclase F (UNE EN ISO 11925-2:2002)
- Wall absorber plates on level D (recycled PET felt): EN 13501-1+A1: B-s1 do. ASTM E-84-18: Class A
- Wall absorber Eco45 on level C (recycled PET): Class C – s3, d0 (DIN EN 13501-1: 2010)
- MDF: Optional



**100% Freedom
0% Disturbances**

Model A



Standard Configuration

Exterior color	White (RAL 9016)
Interior color	White (RAL 9016)
Acoustic absorbers (wall)	 Studiobricks Eco45 (light gray): 100% recycled PET absorbers. Best absorption ever reducing reverb time thanks to its 45 mm thickness and its 25 kg / m³ density. Absorption class: C (0,60 to 0,75 α_w) (UNE-EN ISO 11654:1998) Recycled PET plates (light gray - gray): 100% recycled PET plates absorbers. $\alpha_w = 0,90$ (1000 Hz)
Acoustic absorber (ceiling)	Studiobricks EcotexOne (light gray): Recycled PET felt based on recycled vegetable cotton bras panel. Thickness (cm/in): 20 mm (+/-0,2) / 0,8 in (+/-0,08). Density: 60 kg/m³ (+/-10%). Absorption class: A (0,90 α_w) (BS EN ISO 1654:1997)
Sound control glass door	90 x 210 cm (3 x 6.9 ft), opening to the outside. Aluminum frame with a block of silent laminated safety glass and temperature/sound edge spacer and air chamber: 3+3+16+5+5 mm (0.1+0.1+0.6+0.2+0.2 in). Acoustic sealing. Textured Anthracite gray.
Soundproof ventilation kit (x2)	Adjustable intensity levels, extremely quiet and easy filter exchange.
Acoustic cable tunnel	Up to 10 cables
Lighting	Studiobricks LightPanel 120
Counter (x2)	280 x 1050 x 40 mm lacquered
Carpet	Dark gray (deburred)

Optional Equipment

Lacquer color	<div> <div>WHITE</div> <div>LAKE</div> <div>SKY</div> <div>STONE</div> <div>CANE</div> <div>CORAL</div> <div>CLAY</div> <div>MUSTARD</div> <div>SHADOW</div> <div>ANTHRACITE</div> <div>ANTHRACITE T</div> <div>CHARCOAL</div> <div>MALLOW</div> <div>AIR</div> </div> <p>Ask us for other RAL or special finishing (chrome, copper, metallic...)</p>
Laminate	<div> <div>OAK</div> <div>MAPLE</div> <div>WALNUT</div> <div>POLAR WHITE</div> <div>GRAY</div> </div>
Special height	Yes. Increase or decrease the height of the booth/door.
Left-hand opening (opening to the outside)	Yes
Lockable door	Yes
Door stopper	Yes
Frosted	1 or 2 glasses
Active muffler on roof (exhaust)	Yes
Additional acoustic cable tunnel	Yes
Additional windows	Yes
Air conditioning kit (portable)	Yes

Measurements

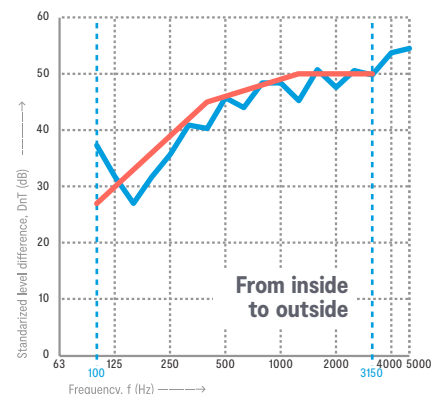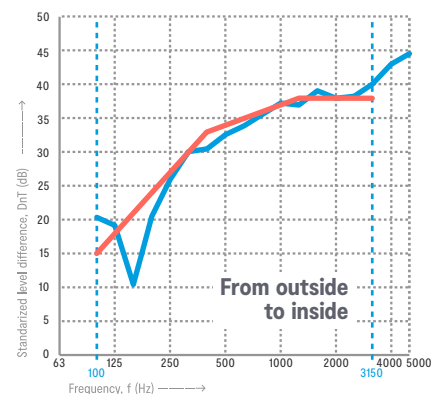

Studiobricks S.L.

(Headquarters and factory)

C/ Segarra, 1, Pol. Ind. La Serra,
Lliçà de Vall, 08185 Barcelona, Spain

Telefon: +34 93 8437459 / +34 605 627 128

info@studiobricks.com

www.studiobricks.com



**100% Freedom
0% Disturbances**